


Dixi

Dixi is one of the **pilot-operating gas pressure regulators** designed and manufactured by Pietro Fiorentini. This device is suitable for use with previously filtered non-corrosive gases, and it is mainly used for medium and low pressure natural gas distribution networks. According to the European Standard EN 334, it is classified as Fail Close (pilot series 200/A) or Fail Open (pilot series 210/A) according to the installed pilot. The Dixi is Hydrogen Ready for NG-H₂ blending.



Medium / small
industry

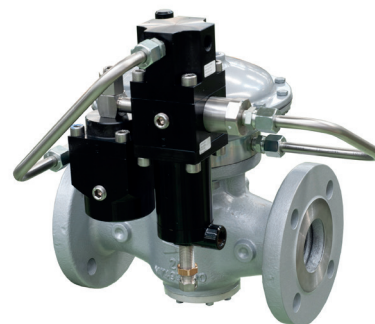

District stations

| Features | Values |
|---|--|
| Design pressure* (PS ¹ / DP ²) | up to 1.6 MPa up to 16 barg |
| Ambient temperature* (TS ¹) | from -20 °C to +60 °C from -4 °F to +140 °F |
| Inlet gas temperature* | from -20 °C to +60 °C from -4 °F to +140 °F |
| Inlet pressure (MAOP / p _{umax} ¹) | from 0.05 to 1.6 MPa from 0.5 to 16 barg |
| Range of downstream pressure (Wd ¹) | <ul style="list-style-type: none"> Without slam shut version: from 0.7 kPa to 0.6 MPa from 7 mbarg to 6 barg With slam shut version: from 0.7 kPa to 0.46 MPa from 7 mbarg to 4.6 barg |
| Available accessories | LA Slam shut, opening indicator |
| Minimum operating differential pressure (Δp _{min} ¹) | 0.01 MPa 0.1 barg |
| Accuracy class (AC ¹) | up to 2.5 up to 1% absolute (depending on working conditions) |
| Lock-up pressure class (SG ¹) | up to 10 |
| Nominal size (DN ^{1,2}) | DN 25 1"; DN 40 1" 1/2; DN 50 2"; |
| Connections | Class 150 RF according to ASME B16.5 and PN16, 25 according to ISO 7005 |

(¹) according to EN334 standard

(²) according to ISO 23555-1 standard

(*) NOTE: Different functional features and/or extended temperature ranges may be available on request. Stated inlet gas temperature range is the maximum for which the equipment's full performance, including accuracy is guaranteed. Product may have a different pressure or temperature ranges according to the version and/or installed accessories.

Table 1 Features

Materials and Approvals

| Part | Material |
|----------------------|--|
| Body | Cast steel ASTM A216 WCB for all sizes Ductile cast iron GS 400-18 ISO 1083 |
| Heads | Die cast aluminium EN AC 43500 |
| Seat | Stainless steel |
| Diaphragm | Rubberized canvas |
| O-rings | Nitrile Rubber |
| Compression fittings | According to DIN 2353 in zinc-plated carbon steel. Stainless steel on request |

NOTE: The materials indicated above refer to the standard models. Different materials can be provided according to specific needs.

Table 2 Materials

Dixi regulator is designed according to the European standard EN 334.

The regulator reacts in closing (Fail Close) or opening (Fail Open) according to EN 334 depending on the pilot installed.

The product is certified according to European Directive 2014/68/EU (PED).

Leakage class: bubble tight, better than VIII according to ANSI/FCI 70-3.



EN 334



PED-CE*

*Not applicable for regulators with pilot series 210

Dixi competitive advantages



Compact and simple design



High accuracy



1:500 High turn-down ratio



Fail Close plug and seat regulator



Built-in pilot filter



Top Entry



Easy maintenance



In-build accessories



Balanced type



Biomethane compatible and
20% Hydrogen blending compatible.
Higher blending available on request